


PN10-16 Lugged Butterfly Valve

Features:

- Cast iron body.
- PN10-16 threaded bolt pattern (metric).
- Resilient seating.
- Nominal pressure: 1.6 mPa (16 bar).
- Aluminium handle with ten-position SS 316 notch plate, CF8M SS316 disc.
- Epoxy resin powder paint according to ISO 21809.

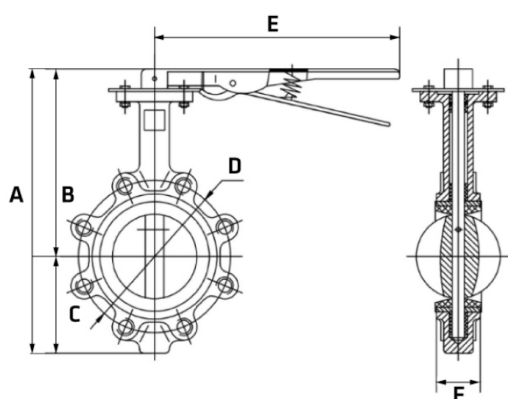

Code	Size	Seat	A	B	C	D	E	F
AA-WV65L-PN16-EPDM	2.5"	EPDM	298	207	91	145	220	45
AA-WV65L-PN16-NBR	2.5"	NBR	298	207	91	145	220	45
AA-VW96L-PN16-NBR	6"	NBR	397	258	139	240	260	54.8
AA-VW98L-PN16-NBR	8"	NBR	455	279	175	295	365	59.6
AA-VW99L-PN16-NBR	10"	NBR	-	-	-	-	-	-
AA-VW300-PN16-EPDM	12"	EPDM	-	-	-	-	-	-